



TECHNICAL DATA SHEET

SK2RIM180-2 Resin distribution tape

► DESCRIPTION

Resin distribution tape is composed of a warp-knitted structure and monofilament-created nooses which are used as flow canal. The tape supports the vacuum infusion process. It can be used on the entry side as resin infusion aid and on the exit side as vacuum canal.

The tape is easy to handle and to attach, adapts to curved component contours and leaves no appreciable marks.

This product is used in various manufacturing processes of parts made of composite materials.

► TECHNICAL DATA




Material type:	PES
Color:	White
Maximum use temperature:	180°C
Melting point:	220°C

► SIZE

Thickness	Width	Length
3,5mm	20mm	25m
3,5mm	43mm	25m

Shelf life: not limited

Storage conditions: it is recommended to store at temperature from -20°C till + 30°C in the original packing.

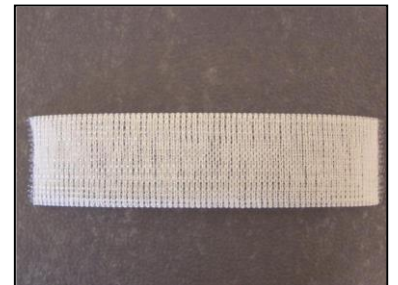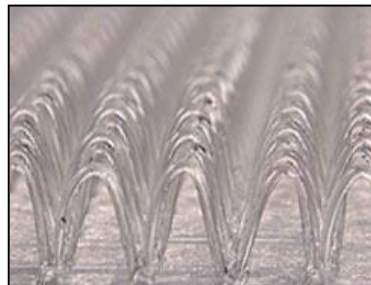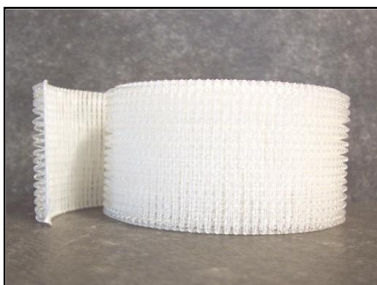

► NOTE

MOQ is 1 roll.