



TECHNICAL DATA SHEET

SK2AT204-5

Economical adhesive tape


► DESCRIPTION

SK2AT204-5 is used for adhesive flash clean-up over or next the bond lines or anywhere extra strength is needed. It can also be used to aid in potting inserts, drilling through SK2AT204-5. The tape is high temperature and tensile strength polyester film coated with pressure sensitive silicone adhesive. SK2AT204-5 could be used in oven and autoclave, such as to perform in protection in chemical milling or acid bath etching. There are multi-purpose functions for composite industry, like holding down vacuum bagging materials, thermocouple wires, masking-of and chemical milling protection. The tape removes easily after the cure.

This product is used in various manufacturing processes of parts made of composite materials.

► TECHNICAL DATA

Carrier type:	Polyester
Adhesive type:	Silicone
Color	Blue
Total thickness:	170µm
Carrier thickness:	125µm
Adhesive thickness:	35µm
Maximum use temperature	204°C

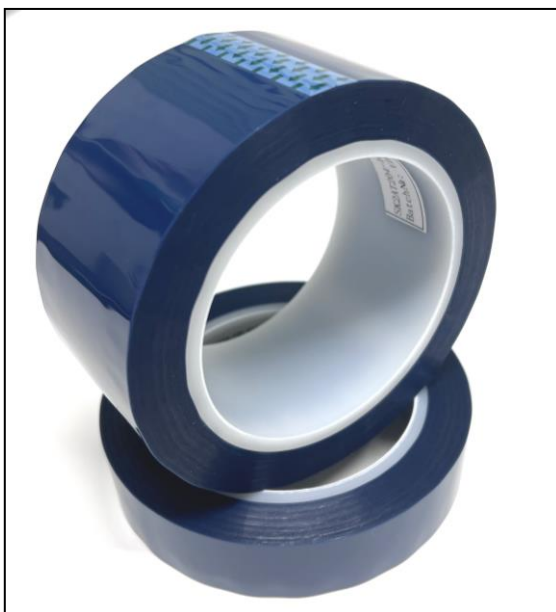



TECHNICAL DATA SHEET

SK2AT204-5 Economical adhesive tape

► SIZE

Reference for order	Width	Length
SK2AT204-5BL170MC2533	25mm	33m
SK2AT204-5BL170MC5033	50mm	33m

Shelf life: 24 months minimum in original packing.

Storage conditions: It is recommended to store at temperature from +10°C until +30°C in the original packing.

► NOTE

Other sizes are available on special order.