



# TECHNICAL DATA SHEET

## SK2VV270-5

### Multi cartridge tree 3x1

#### ► DESCRIPTION

The multi cartridge tree provides a multi-point connection for extra line capacity. A single threaded or QRC inlet can be adapted to either a threaded connection or used a quick disconnect, three outlet connectors provide extra capacity (any number of outlet connectors are available at special request).


Quick disconnect plugs are fitted with high temperature seals and are fully resealable. All parts are manufactured from stainless steel and Manufactured to ISO B.

This product is used in various manufacturing processes of parts made of composite.

#### ► TECHNICAL DATA

Material type:	Stainless steel
Material type of O ring seals:	High temperature Viton 270°C
Coupling size:	1/4
Treaded size:	1/4 inch female BSP
Maximum autoclave pressure*:	20 Bar

Tree type	3 Connection	1 Inlet
SK2VV270-51	3 x QRC 1/4	QRC 1/4
SK2VV270-52	3 x QRC 1/4	1/4 inch female BSP

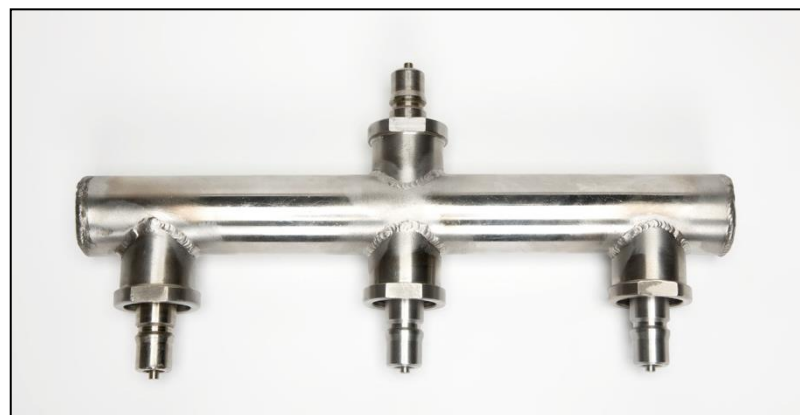

Storage conditions: it is recommended to store at temperature from +10°C until +30°C in the original packing.



# TECHNICAL DATA SHEET

**SK2VV270-5**  
**Multi cartridge tree 3x1**

► **NOTE**

\* Maximum use pressure and temperature should be determined under your actual process conditions.

All end fittings are 100% vacuum tested after assembly.

Recommended maintenance interval 1000 hours based on operating temperatures up to 180°C when using with our connections.