




SK2AT205-1 is a high-temperature, high-tensile-strength polyester film tape with a pressure-sensitive silicone adhesive coating. It's ideal for oven and autoclave use in flash-breaking, securing vacuum bagging materials, and positioning thermocouples.

This tape excels in masking and chemical milling protection, offering excellent chemical resistance. It releases cleanly and residue-free after curing.

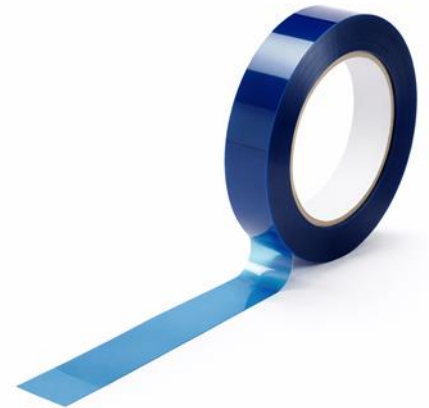

TECHNICAL DATA	VALUE
Carrier type	Polyester
Adhesive type	Silicone
Color	Blue
Elongation at break	100%
Maximum use temperature*	205°C

SIZE

Total thickness	60 µm
Carrier thickness	30 µm
Adhesive thickness	30 µm
Width	25 mm and 50 mm as standard
Length	66 m

STORAGE

Shelf life: minimum 12 months in original packaging
 Storage: store in a cool, dry place in the original packaging, protected from direct sunlight and other heat sources

NOTES

*Maximum use temperature depends on specific process conditions. Verification testing is recommended prior to serial production.
 Custom sizes available upon request

Technical values are provided to the best of our knowledge and are based on data considered reliable. Users are responsible for verifying suitability and assume all associated risks.