


# TECHNICAL DATA SHEET

## SK2RF200-1

Release film



SK2RF200-1 is a Polymethylpentene (PMP) copolymer release film rated up to 200°C for autoclave composite manufacturing. Recommended for high-temperature vacuum infusion with mono-component resins; non-contaminating, suitable for contoured or flat surfaces.

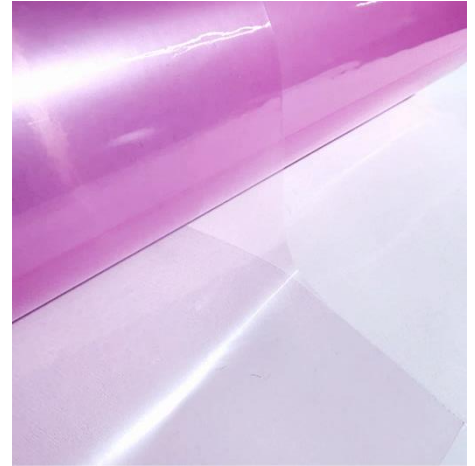

TECHNICAL DATA	VALUE
Material type	PMP
Color	purple / light purple
Elongation at break*	200%
Tensile strength*	40 MPa
Maximum use temperature*	200°C

### STORAGE

Shelf life: unlimited.

Storage conditions: store at 10–30°C in original packaging, shielded from direct sunlight and heat sources

### NOTE

Thickness: 25µm, 30µm, 50µm  
Perforation: PC

Lay flat width / Folding shapes:  
1500mm – SHT

The values given in this TDS are average measurements; a standard tolerance of ±15% applies to all stated figures

\* MD unless specified

Technical values are provided to the best of our knowledge and are based on data considered reliable. Users are responsible for verifying suitability and assume all associated risks.