




SK2RIM120-3 is a low print belt that can be used under omega tube on top of infusion mesh, for reducing the print of omega tube on the laminate.

This product is used in various manufacturing processes of parts made of composite materials.

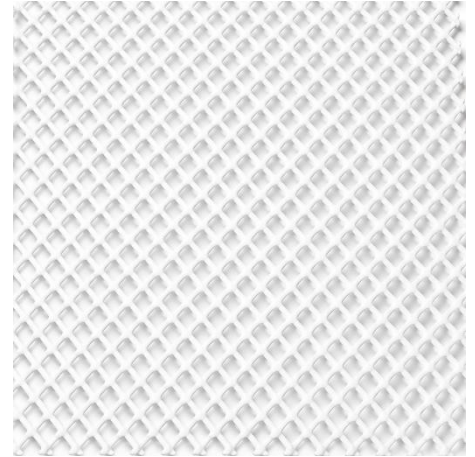

TECHNICAL DATA	VALUE
Material type	PE
Color	White
Weight	400 g/m ²
Maximum use temperature	120°C

THICKNESS	WIDTH
1,8 mm ± 0,2 mm	100mm



Omega flow line SK2RIM120-5 with low print belt SK2RIM120-3



STORAGE

Shelf life: not limited
Storage conditions: it is recommended to store at temperature from -20°C till + 30°C in the original packing.

NOTES

Other widths are available upon request.