


TECHNICAL DATA SHEET

SK2ST200-1

Sealant tape



SK2ST200-1 is a sealant tape developed for vacuum bagging operations, formulated to outperform all tapes in its class. With aggressive initial tack, it will maintain an air-tight seal during the cure cycle, yet strip clean from the tool, with virtually no trace to residue. SK2ST200-1 provides easy de-bagging and minimal to no clean-up between production cycles. It exhibits these excellent usage and release characteristics from composite and metal tools, in both oven and autoclave applications.

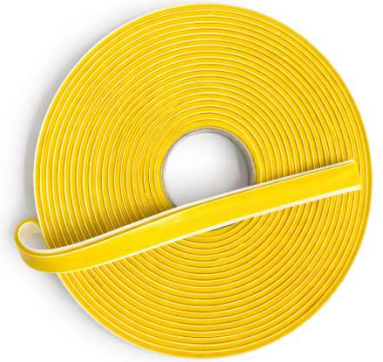

TECHNICAL DATA	VALUE
Material	Synthetic polymer butyl based
Color	Yellow
Recommended use temperature	200°C
Maximum use temperature*	204°C

SIZE

Thickness	3 mm
Width	12 mm
Length	9 m
Rolls in Box	22 rolls

STORAGE

Shelf life: 12 months minimum in the original packing.

Storage conditions: store at 10–30°C in original packaging, shielded from direct sunlight and heat sources.

NOTES

*Maximum use temperature depends on specific process conditions. Verification testing is recommended prior to serial production.

Technical values are provided to the best of our knowledge and are based on data considered reliable. Users are responsible for verifying suitability and assume all associated risks.