




SK2TR260-3

Semi-permanent tool release film

SKTR260-3 is a PTFE-coated light glass fabric with a high performance, silicone pressure-sensitive adhesive on one side. The PTFE surface exhibits good release properties in demanding high temperature applications. The product has a yellow corrugated liner to protect the adhesive surface and to ease identification and use. This film is ideal for use on flat areas where release properties are needed, on the mould surfaces while offering multiple releases. SKTR260-3 will release from most resin systems.

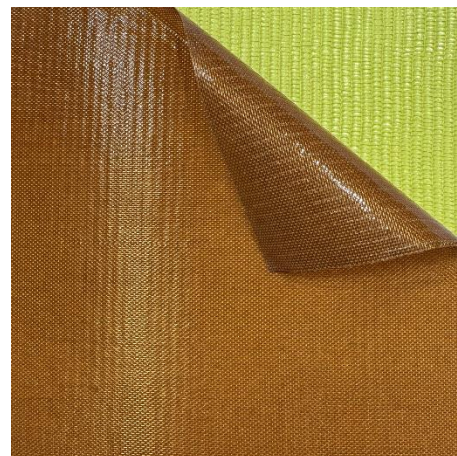

TECHNICAL DATA	VALUE
Carrier	PTFE-coated glass
Adhesive	Silicone
Color	Brown
Tensile strength	600 N/5cm
Peel adhesion strength	16,0 N/5cm
Total thickness	130 µm
Carrier thickness	80 µm
Adhesive thickness	50 µm
PTFE content	67 %
Weight	130 g/m ²
Maximum use temperature*	260°C

PRODUCT REFERENCE	WIDTH	LENGTH
SK2TR260-3BR125MC5030	500mm	30m
SK2TR260-3BR125MC10050	1000mm	50m

STORAGE

Shelf life: 12 months in original packing
Storage conditions: store at 10–30°C in original packaging, shielded from direct sunlight and heat sources

NOTES

* Maximum use temperature should be determined in actual process conditions. The maximum use temperature depends on the duration at maximum temperature and is process specific, we recommend testing prior to use.