



TECHNICAL DATA SHEET


SK2AT100-2

Double side coated adhesive mesh from fiberglass

► DESCRIPTION

SK2AT100-2 is a double side coated adhesive mesh from fiberglass of 45 g/m². It is used for local fixing of reinforcement in the processes with closed mould.

This product is used in various manufacturing processes of parts made of composite materials.

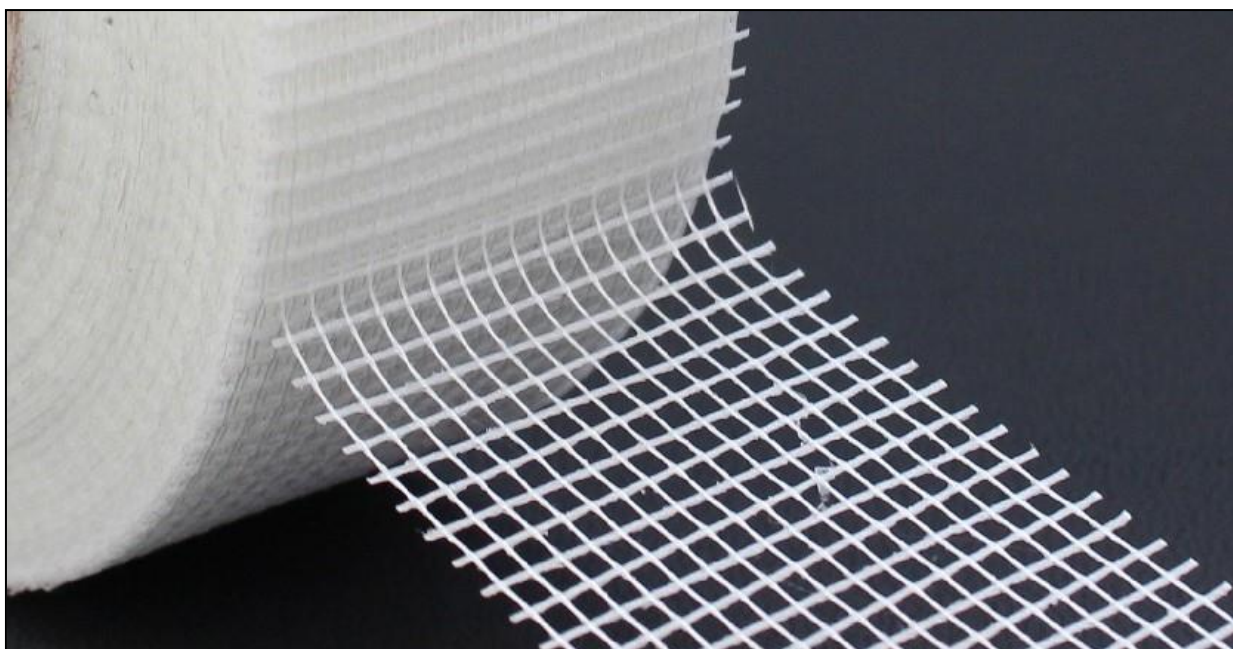

► TECHNICAL DATA

Carrier type:	Fiberglass mesh
Adhesive type:	ACR
Color	White
Total weight:	72g/m ²
Glue weight:	26 g/m ²
Warp:	3,7 Ends / cm x 2 x 34 tex glass
Weft:	3 Ends / cm x 68 tex glass
Tensile strength MD:	800 N/5 cm
Tensile strength TD:	700 N/5 cm
Elongation at break MD:	3%
Elongation at break TD:	3%
Maximum use temperature:	100°C



TECHNICAL DATA SHEET

SK2AT100-2

Double side coated adhesive mesh from fiberglass

► SIZE

Thickness	Width	Length
0,3mm	30mm	100 m

Shelf life: 12 months minimum in original packing.

Storage conditions: It is recommended to store at temperature from +10°C until +30°C in the original packing.

► NOTE

Packaging: 34 rolls per carton, 36 cartons par pallet.