




SK2AT204-1 is a high temperature and tensile strength polyester film coated with pressure sensitive silicone adhesive. SK2AT204-1 could be used in oven and autoclave for flash breaking application, holding down vacuum bagging materials and thermocouples.

SK2AT204-1 is designed to perform in masking applications and chemical milling protection requiring high chemical resistance. It removes easily after the cure.

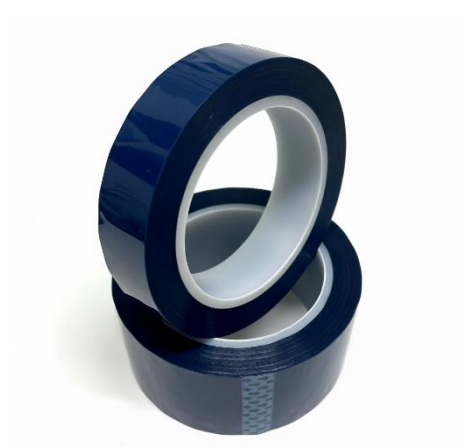

TECHNICAL DATA	VALUE
Carrier type	Polyester
Adhesive type	Silicone
Color	Blue
Maximum use temperature*	204°C

SIZE	
Total thickness	60 µm
Carrier thickness	28 µm
Adhesive thickness	32 µm
Width	12,5 mm, 25 mm and 50 mm as standard
Length	66 m

STORAGE

Shelf life: minimum 24 months in original packaging
 Storage: store in a cool, dry place in the original packaging, protected from direct sunlight and other heat sources

NOTES

*Maximum use temperature depends on specific process conditions. Verification testing is recommended prior to serial production.
 Custom sizes available upon request

Technical values are provided to the best of our knowledge and are based on data considered reliable. Users are responsible for verifying suitability and assume all associated risks.