




This very heavy, high resistance, non-woven polyester breather is used for high pressure long curing cycles. It avoids any sharp radius for vacuum bag protection.

This product is used in various manufacturing processes of parts made of composite materials.

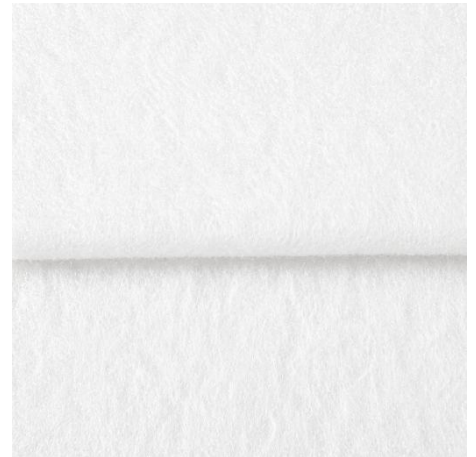

TECHNICAL DATA	VALUE
Material type:	Polyester
Weight:	600 g/m <sup>2</sup>
Recommended curing pressure*	< 7 Bar
Maximum use temperature*	205°C
Color:	White
Fibre thickness:	17dtex

THICKNESS	WIDTH	LENGTH
6-7 mm	1500mm	25 m

**STORAGE**

Shelf life: not limited.  
Storage conditions: it is recommended to store at temperature from -20°C until +30°C in the original packing.

**NOTES**

Other widths are available on special order.  
Max. width is 2.4 m.  
\* Maximum use pressure and temperature should be determined under your actual process conditions.

Technical values are provided to the best of our knowledge and are based on data considered reliable. Users are responsible for verifying suitability and assume all associated risks.